


Single N-Channel Logic Level Enhancement Mode Field Effect Transistor

•Product Summary:

	N-CH
BVDSS	100V
$R_{DS(on)} (MAX.) @ V_{GS}=10V$	12.0m Ω
$R_{DS(on)} (MAX.) @ V_{GS}=4.5V$	15.0m Ω
$I_D @ T_C=25^{\circ}C$	90.0A
$I_D @ T_A=25^{\circ}C$	11.0A

• Pin Description:

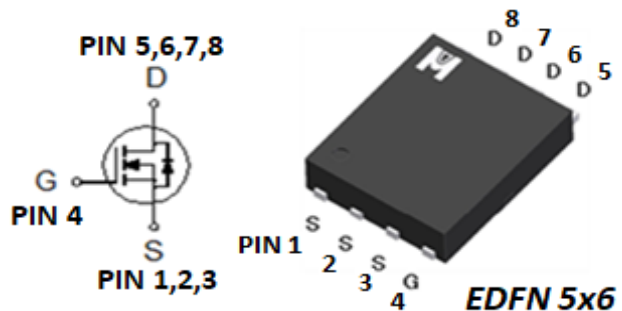

Single N Channel MOSFET

UIS, Rg 100% Tested

RoHS & Halogen Free & TSCA Compliant



•ABSOLUTE MAXIMUM RATINGS ($T_C = 25^{\circ}C$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25^{\circ}C$	I_D	90	A
	$T_C = 100^{\circ}C$		57	
Continuous Drain Current	$T_A = 25^{\circ}C$	I_D	11	
	$T_A = 70^{\circ}C$		8	
Pulsed Drain Current ¹		I_{DM}	152	mJ
Avalanche Current		I_{AS}	22	
Avalanche Energy	$L = 0.1mH$	EAS	24.2	
Repetitive Avalanche Energy ²	$L = 0.05mH$	EAR	12.1	W
Power Dissipation	$T_C = 25^{\circ}C$	P_D	166.7	
	$T_C = 100^{\circ}C$		66.7	W
Power Dissipation	$T_A = 25^{\circ}C$	P_D	2.5	
	$T_A = 70^{\circ}C$		1.6	°C
Operating Junction & Storage Temperature Range		T_J, T_{stg}	-55 to 150	

•THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	$R_{\theta JC}$		0.75	°C/W
Junction-to-Ambient ³	$R_{\theta JA}$		50	

¹Pulse width limited by maximum junction temperature.

²Duty cycle < 1%

³The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^{\circ}C$.

⁴Guarantee by Engineering test

▪ ELECTRICAL CHARACTERISTICS (T_j = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage ⁴	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250uA	100			V
Gate Threshold Voltage ⁴	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250uA	1	1.6	3	
Gate-Body Leakage ⁴	I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V			±100	nA
Zero Gate Voltage Drain Current ⁴	I _{DSS}	V _{DS} = 80V, V _{GS} = 0V			1	uA
		V _{DS} =80V, V _{GS} =0V, T _J = 125 °C			25	
On-State Drain Current ¹	I _{D(ON)}	V _{DS} =5V, V _{GS} = 10V	90			A
Drain-Source On-State Resistance ^{1,4}	R _{DS(ON)}	V _{GS} = 10V, I _D = 12A		10	12	mΩ
		V _{GS} = 4.5V, I _D = 10A		12	15	
Forward Transconductance ¹	g _{fs}	V _{DS} = 5V, I _D = 12A		45		S
DYNAMIC						
Input Capacitance ⁵	C _{iss}	V _{GS} = 0V, V _{DS} = 50V, f = 1MHz		1595		pF
Output Capacitance ⁵	C _{oss}			267		
Reverse Transfer Capacitance ⁵	C _{rss}			25		
Gate Resistance ^{4,5}	R _g	f = 1MHz		0.8		Ω
Total Gate Charge ^{1,2,5}	Q _g (V _{GS} =10V)	V _{DS} = 50V, V _{GS} = 10V, I _D = 12A		30.8		nC
	Q _g (V _{GS} =4.5V)			17.4		
Gate-Source Charge ^{1,2,5}	Q _{gs}			3.7		
Gate-Drain Charge ^{1,2,5}	Q _{gd}			9.0		
Turn-On Delay Time ^{1,2,5}	t _{d(on)}	V _{DS} = 50V, V _{GS} = 10V, I _D = 5A , R _g = 6Ω		7.8		nS
Rise Time ^{1,2,5}	t _r			9.7		
Turn-Off Delay Time ^{1,2,5}	t _{d(off)}			48.4		
Fall Time ^{1,2,5}	t _f			37.8		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS						
Continuous Current	I _S				90	A
Pulsed Current ³	I _{SM}				152	
Forward Voltage ^{1,4}	V _{SD}	I _F = 12A, V _{GS} = 0V			1.3	V
	t _{rr}	I _F = 12A, dI _F /dt = 100A / uS		50.0		nS
Reverse Recovery Charge ⁵	Q _{rr}			51.4		nC

¹ Pulse test : Pulse Width ≤ 300 usec, Duty Cycle ≤ 2%.

² Independent of operating temperature.

³ Pulse width limited by maximum junction temperature.

⁴ Guarantee by FT test Item

⁵ Guarantee by Engineering test



▪ TYPICAL CHARACTERISTICS

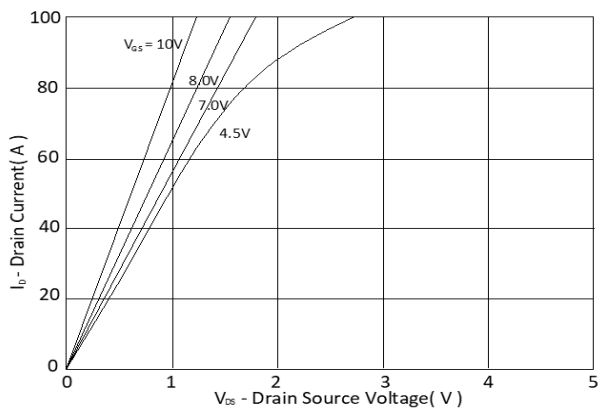


Fig.1 Typical Output Characteristics

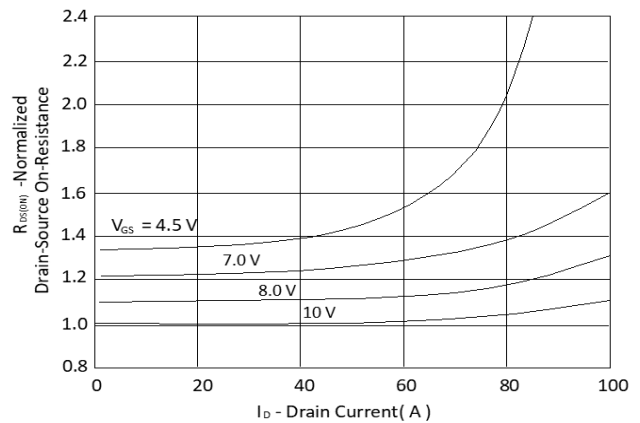


Fig.2 On-Resistance Variation with Drain Current and Gate Voltage

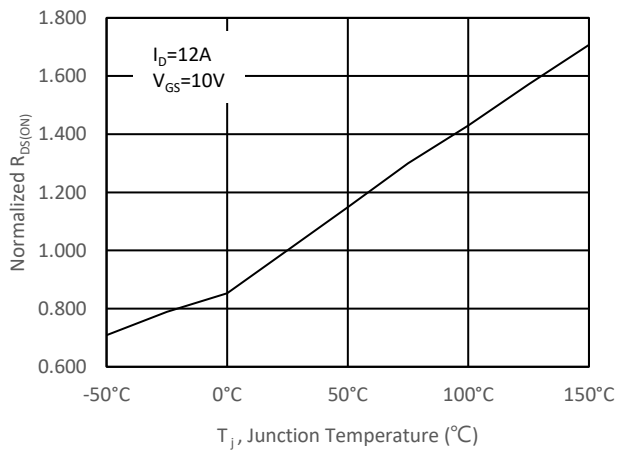


Fig.3 Normalized On-Resistance v.s. Junction Temperature

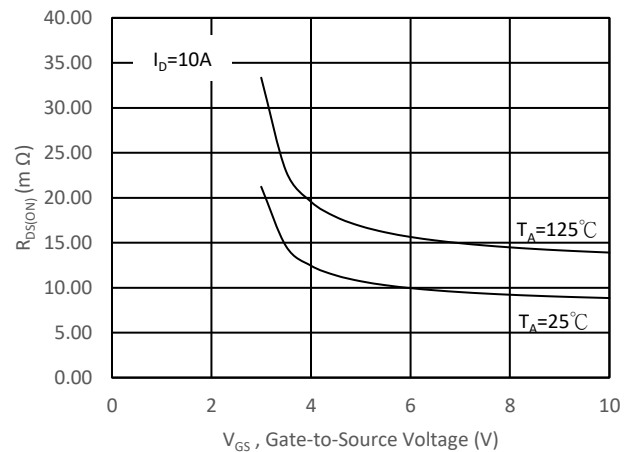


Fig.4 On-Resistance v.s. Gate Voltage

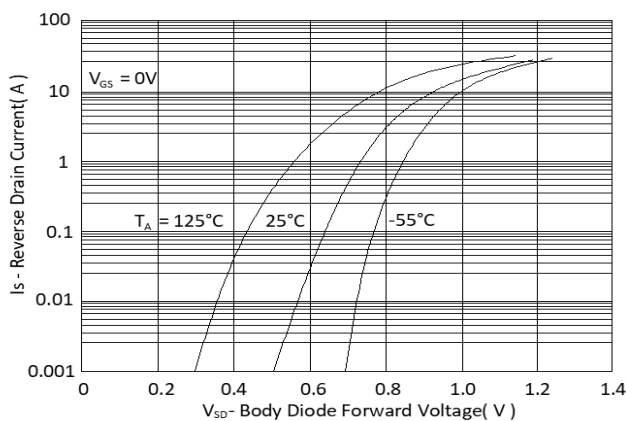


Fig.5 Forward Characteristic of Reverse Diode







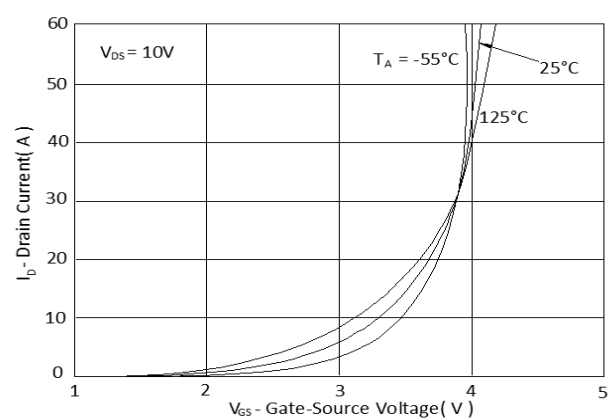


Fig.6 Transfer Characteristics

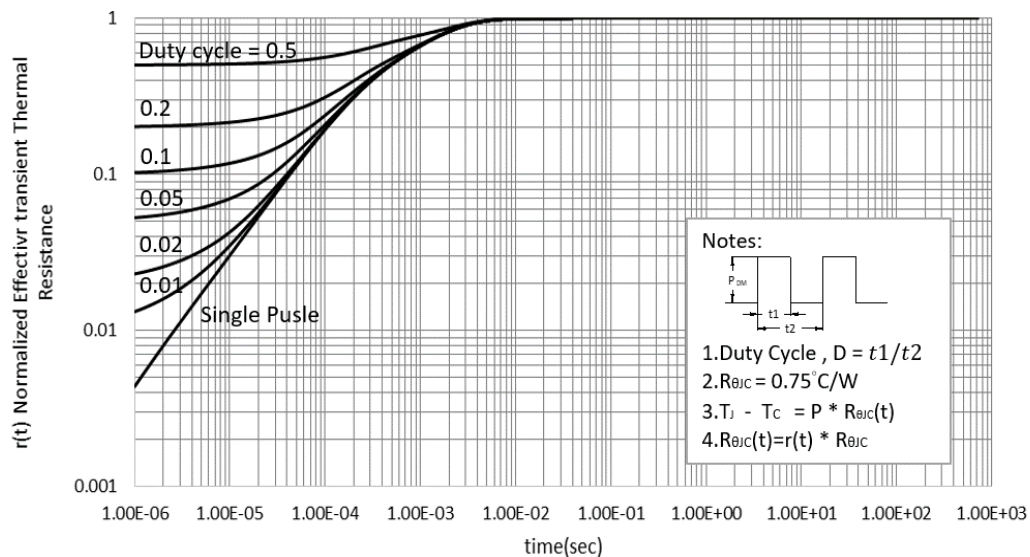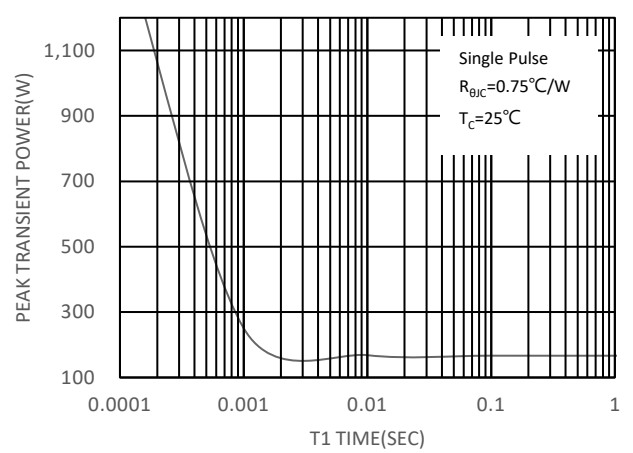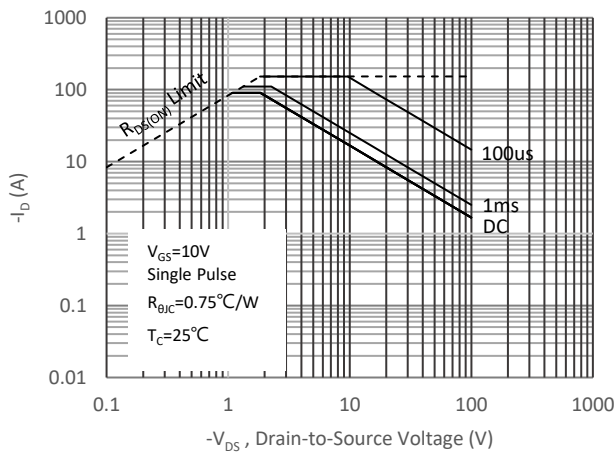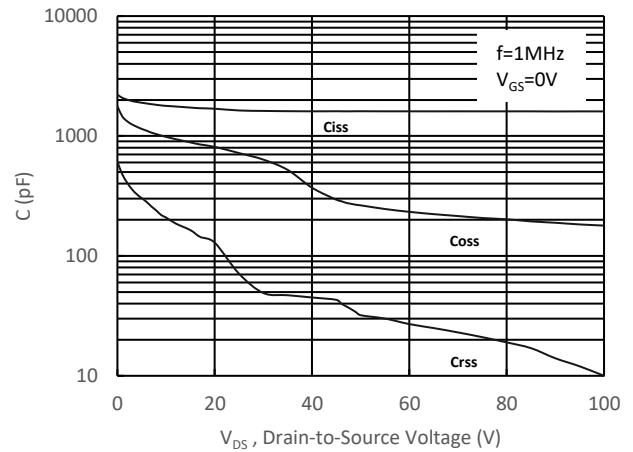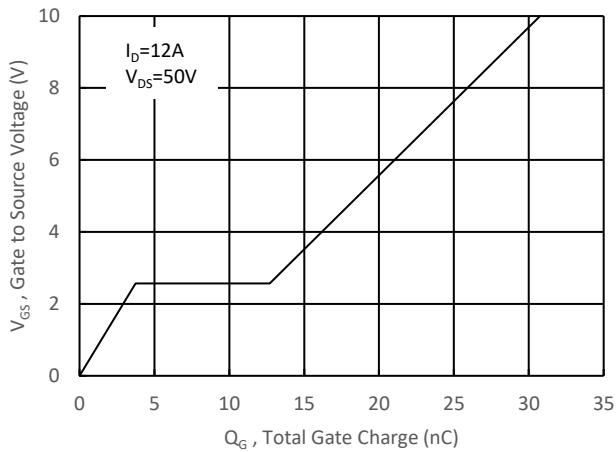


Ordering & Marking Information:

Device Name: EMB12N10H for EDFN 5x6

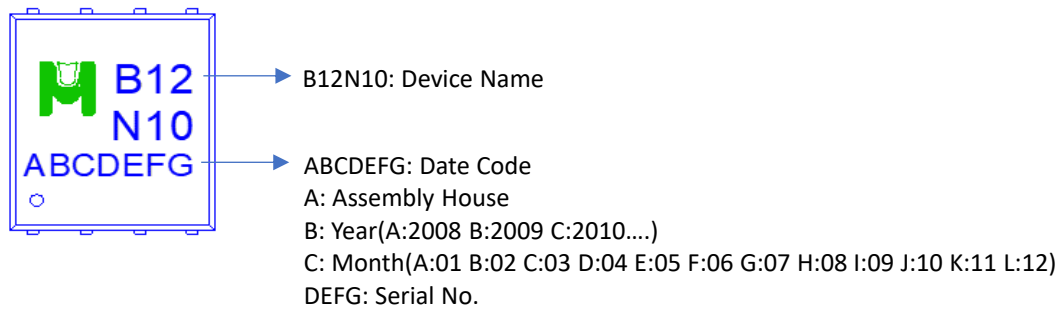


Outline Drawing

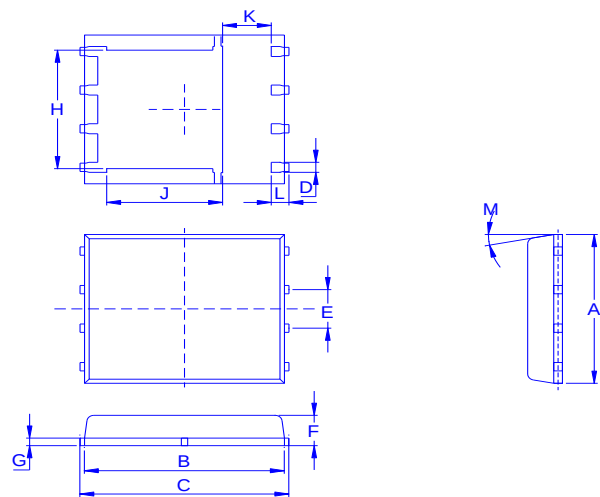


Dimension	A	B	C	D	E	F	G	H	J	K	L	M
Min	4.8	5.55	5.9	0.3	1.17	0.85	0.15	3.61	3.18	1	0.38	0°
Typ.	4.9	5.7	6	0.4	1.27	0.95	0.2	3.87	3.44	1.2	0.4	
Max	5.4	5.85	6.15	0.51	1.37	1.17	0.34	4.31	3.78	1.39	0.71	12°

Footprint

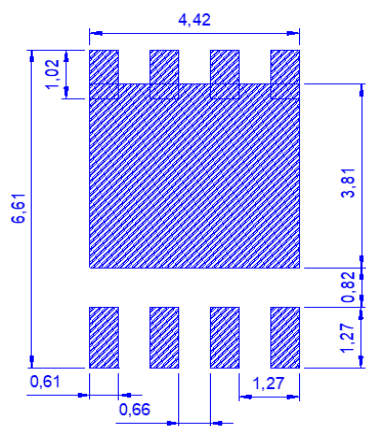

◆ Tape&Reel Information:2500pcs/Reel

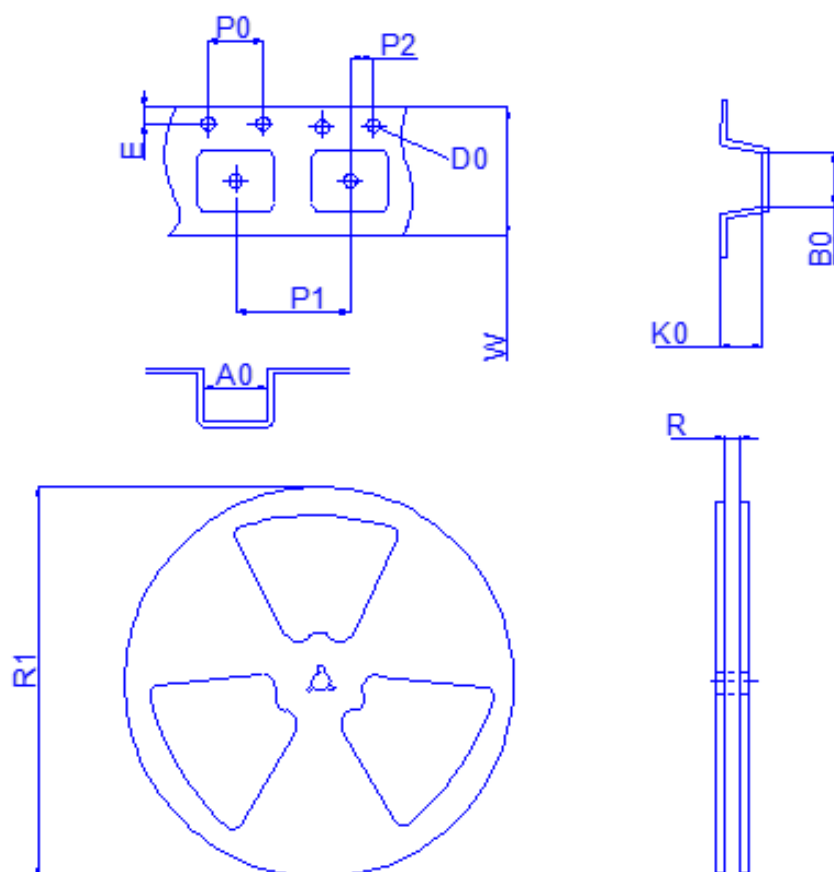

Package	EDFN5X6
Reel	13"
Device orientation	FEED DIRECTION

Dimension in mm

Dimension	Carrier tape									Reel	
	A0	B0	D0	E	K0	P0	P1	P2	W	R	R1
Typ.	6.4	5.3	1.5	1.8	1.6	4	8	2	12	12.4	330
±	0.2	0.2	0.1	0.1	0.6	0.1	0.1	0.1	0.3	2	2